



JAOP6SL



JAOP6



JAOP8

DOYON OVEN/PROOFER COMBINATIONS

JET AIR OVEN/PROOFER (JAOP6 AND HIGHER)


The JAOP oven series from DOYON are known worldwide for their unique and patented JET AIR SYSTEM. The air moves in one direction for 2.5 minutes, stops for 25 seconds then moves the other way for 2.5 minutes resulting in a bidirectional and gentle velocity air flow for exceptional baking results. This system will help you bake faster and more evenly without having to turn pans during baking time. The Jet Air system will save you energy and labor costs.

The JAOP oven series provides great flexibility in terms of range of products that can be baked and cooked. It features a manual one shot and constant pulse steam injection. To get the results you really want, we have added as standard a two speed fan system as well as a delay timer.

DOYON's proofer provides uniform proofing from top to bottom with its even air flow system, fully automatic humidity system for heat and moisture (no water pans to fill). It comes with heat and humidity controls. It's the easiest way to proof!

VERSATILITY

Bread, rolls, buns, crusty breads, pastries, muffins, cookies, cakes, pies, bagels, croissants, soups and ryes, pizza, hamburgers, bacon, game hens, chicken, turkey, multimeal prep, bulk vegetables/casseroles, slow cook/retherm.

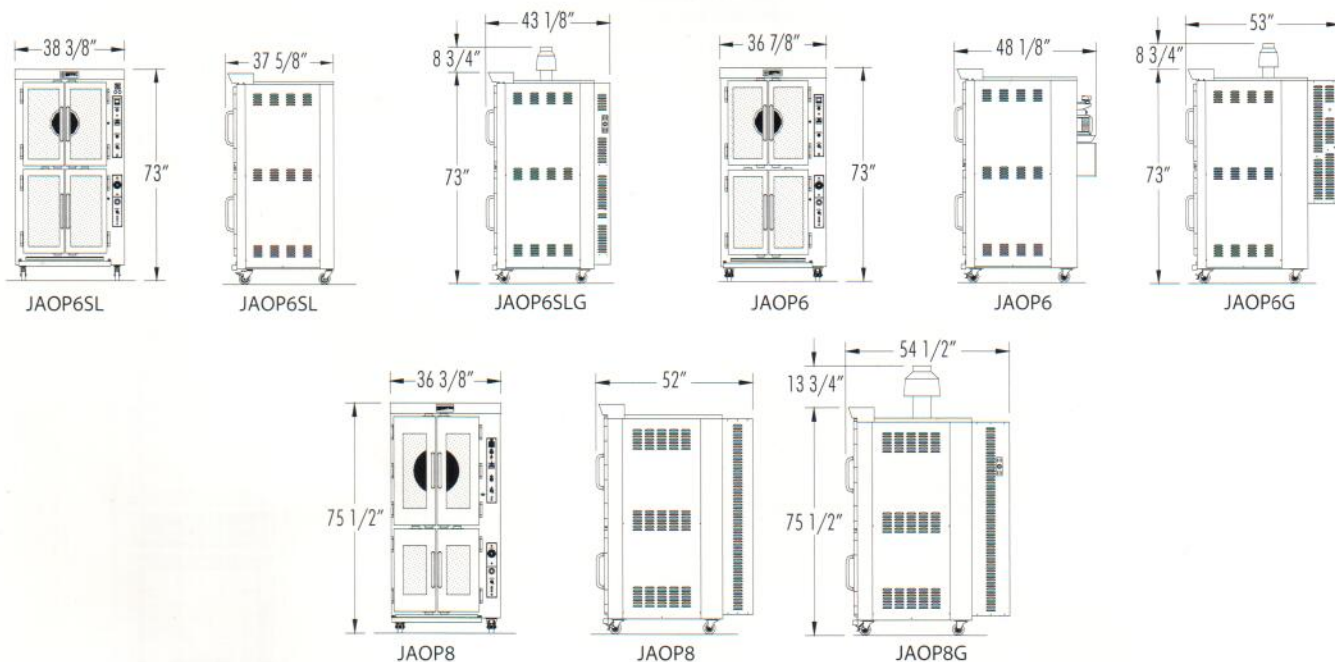

SPECIFICATIONS:

D.H. Draft Hood G.I. Gas Inlet (NPT) W.I. Water Inlet (NPT)

CODING Prefix

JAOP: JET AIR Oven Proofer

Suffix

SL: Side pan loading

G : Gas

Numbers Pans fitting in the oven

| Model | Crated Weight | Overall Dimensions | | | Interior Dimensions | | | | | | Capacity Pan (18" x 26") | | Shelf spacing | | Gas System | | | Water Inlet | Electrical System | | | | | |
|----------|---------------|--------------------|-------------------|-------------------|---------------------|------------------|------------------|------------------|------------------|------------------|-----------------------------|---------|------------------|------------|------------|-------------|------|----------------|-------------------|-------------|----------------|----------------|-------------|----------------|
| | | | | | Oven | | | Proofer | | | | | | | | | | | Volts | Phases | Amps | kW | Wires* | Hz |
| | | W | D | H | W | D | H | W | D | H | Oven | Proofer | Oven | Proofer | BTU | D.H. | G.I. | | | | | | | |
| JAOP6SL | 965 (438) | 38 3/8" (975) | 37 5/8" (956) | 73" (1854) | 26 3/4" (679) | 19 1/2" (495) | 26 1/4" (667) | 27" (686) | 29" (737) | 26 1/2" (673) | 6 | 9 | 3 1/2" (89) | 3" (76) | | | | 1/4" | 208 240 | 3 1 | 46 59 | 14 14 | 3 2 | 60 60 |
| JAOP6SLG | 1135 (515) | 38 3/8" (975) | 43 1/8" (1095) | 73" (1854) | 26 3/4" (679) | 18 1/2" (470) | 26 1/4" (667) | 27" (686) | 29" (737) | 26 1/2" (673) | 6 | 9 | 3 1/2" (89) | 3" (76) | 65 000 | 4" (102) | 1/2" | 1/4" | 240 208 | 1 1 | 17 17 | 4 4 | 2 2 | 60 60 |
| JAOP6 | 965 (438) | 36 7/8" (937) | 48 1/8" (1222) | 73" (1854) | 25 1/2" (648) | 30 1/2" (775) | 26 1/4" (667) | 26 1/2" (673) | 36 1/2" (927) | 26 1/2" (673) | 6 | 18 | 3 1/2" (89) | 3" (76) | | | | 1/4" | 208 240 | 3 1 | 46 59 | 14 14 | 3 2 | 60 60 |
| JAOP6G | 1135 (515) | 36 7/8" (937) | 53" (1346) | 73" (1854) | 25 1/2" (648) | 29 1/2" (749) | 26 1/4" (667) | 26 1/2" (673) | 36 1/2" (927) | 26 1/2" (673) | 6 | 18 | 3 1/2" (89) | 3" (76) | 65 000 | 4" (102) | 1/2" | 1/4" | 240 208 | 1 1 | 17 17 | 4 4 | 2 2 | 60 60 |
| JAOP8 | 1000 (454) | 36 3/8" (924) | 52" (1321) | 75 1/2" (1918) | 23 1/2" (597) | 31" (787) | 33 1/2" (851) | 26 1/2" (673) | 42" (1065) | 25" (635) | 8 | 12 | 3 1/2" (89) | 3" (76) | | | | 1/4" | 208 240 208 | 1 1 3 | 64 59 46 | 14 14 14 | 2 3 3 | 60 60 60 |
| JAOP8G | 1135 (515) | 36 3/8" (924) | 54 1/2" (1384) | 75 1/2" (1918) | 23 1/2" (597) | 30" (762) | 33 1/2" (851) | 26 1/2" (673) | 42" (1065) | 25" (635) | 8 | 12 | 3 1/2" (89) | 3" (76) | 65 000 | 6" (152) | 1/2" | 1/4" | 240 208 | 1 1 | 17 17 | 4 4 | 2 2 | 60 60 |

OTHER VOLTAGES AVAILABLE

*Ground wire not included CONDENSED CATALOG